


Product Description

- ◆ MOSFET Output
- ◆ Control Voltage: 5VDC, 12VDC, 24VDC
- ◆ Load Current: 2A, 3A, 4A, 5A
- ◆ Dielectric Strength: 2500Vrms
- ◆ RoHS Compliant
- ◆ Din-rail Mounting Socket Available

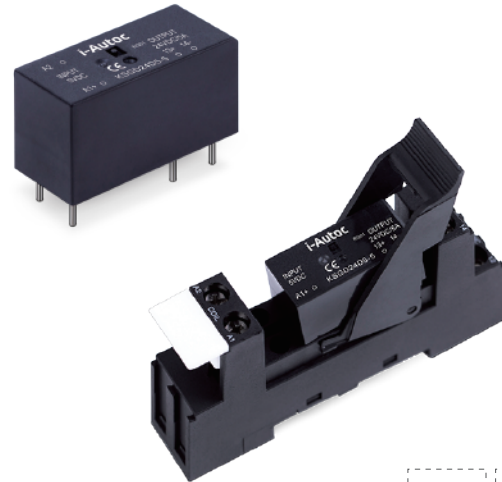

Product Selection

KSGD	48	D	2	-5	D	(XXX)
KSGD Series	Load Voltage 24: 0-28.8VDC 48: 0-48VDC	Control Mode D: DC Control	Load Current 2: 2Amp 3: 3Amp 4: 4Amp 5: 5Amp	Control Voltage 5: 5VDC 12: 12VDC 24: 24VDC 48: 48VDC 60: 60VDC	Socket Blank: without socket D: with socket	Customized Code

Available Part Numbers

Control Mode	2A	3A	4A	5A
5VDC	KSGD24D2-5(D)	KSGD24D3-5(D)	KSGD24D4-5(D)	KSGD24D5-5(D)
	KSGD48D2-5(D)	KSGD48D3-5(D)	KSGD48D4-5(D)	KSGD48D5-5(D)
12VDC	KSGD24D2-12(D)	KSGD24D3-12(D)	KSGD24D4-12(D)	KSGD24D5-12(D)
	KSGD48D2-12(D)	KSGD48D3-12(D)	KSGD48D4-12(D)	KSGD48D5-12(D)
24VDC	KSGD24D2-24(D)	KSGD24D3-24(D)	KSGD24D4-24(D)	KSGD24D5-24(D)
	KSGD48D2-24(D)	KSGD48D3-24(D)	KSGD48D4-24(D)	KSGD48D5-24(D)
48VDC	KSGD24D2-48(D)	KSGD24D3-48(D)	KSGD24D4-48(D)	KSGD24D5-48(D)
	KSGD48D2-48(D)	KSGD48D3-48(D)	KSGD48D4-48(D)	KSGD48D5-48(D)
60VDC	KSGD24D2-60(D)	KSGD24D3-60(D)	KSGD24D4-60(D)	KSGD24D5-60(D)
	KSGD48D2-60(D)	KSGD48D3-60(D)	KSGD48D4-60(D)	KSGD48D5-60(D)

Technical Specifications

Input Specifications (Ta=25°C)		
Control Voltage Range	5	4-6VDC
	12	9.6-14.4VDC
	24	19.2-28.8VDC
	48	38.4-57.6VDC
	60	48-72VDC
Must Turn-on Voltage	5	4VDC
	12	9.6VDC
	24	19.2VDC
	48	38.4VDC
Must Turn-off Voltage	60	48VDC
Maximum Input Current		1VDC
		25mA


Output Specifications (Ta=25°C)		
Load Voltage Range	24VDC	0-28.8VDC
	48VDC	0-48VDC
Load Current Range	2A	0.02-2A
	3A	0.02-3A
	4A	0.02-4A
	5A	0.02-5A
Maximum Surge Current (@10ms)	2A	20Apk
	3A	30Apk
	4A	40Apk
	5A	50Apk
Transient Overvoltage	24VDC	60Vpk
	48VDC	75Vpk
TVS Breakdown Voltage Range	24VDC	37.1-41VDC
	48VDC	64.6-71.4VDC
Maximum Turn-on Time		1ms
Maximum Turn-off Time		1ms
Maximum Off-State Leakage Current (@Rated Voltage)		0.1mA
Maximum On-State Voltage Drop (@Rated Current)		0.3VDC

General Specifications (Ta=25°C)		
Dielectric Strength (50/60Hz)	Input/Output	2500Vrms
Minimum Insulation Resistance (@500VDC)		1000mΩ
Ambient Temperature Range		-30°C ~ +80°C
Storage Temperature Range		-30°C ~ +100°C
Weight (Typical)	without Socket	15g
	with Socket	50g


Applications

Suitable for small power DC motor or electromagnetic valve etc.


Outline Dimensions

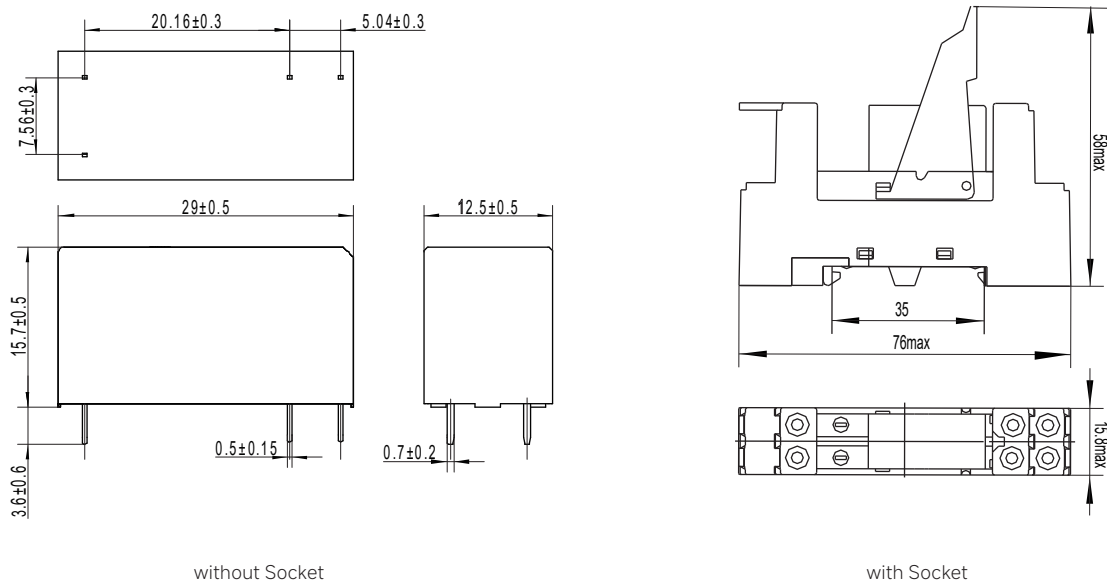

Wiring Diagram




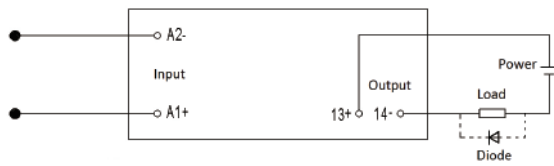


without Socket

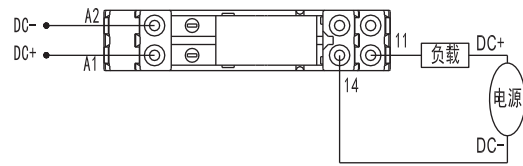

with Socket

Thermal Derating Curve

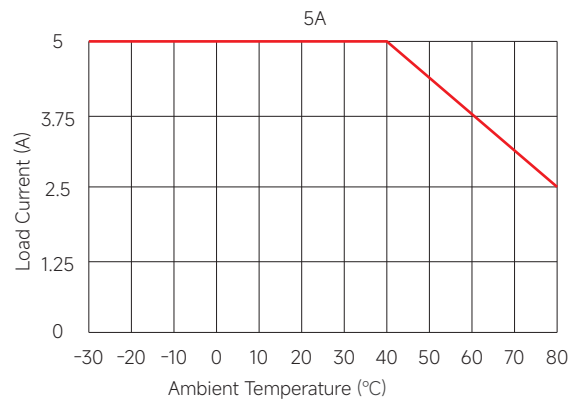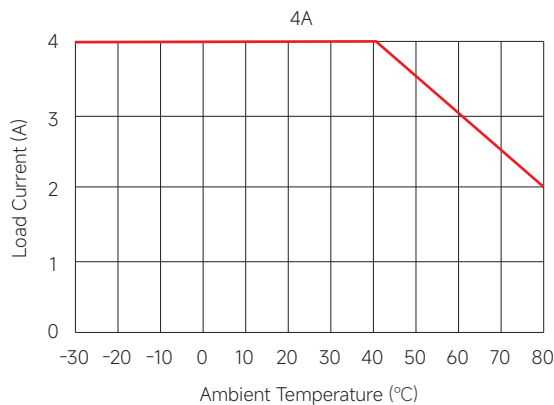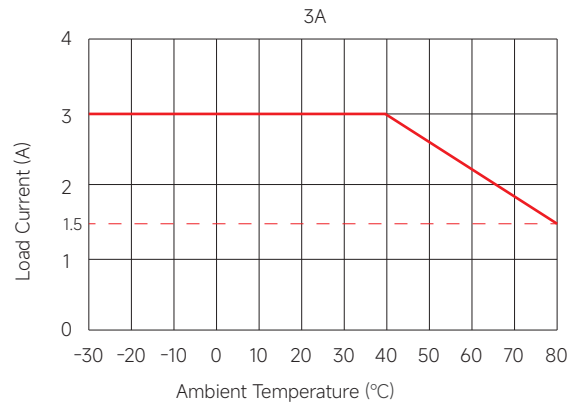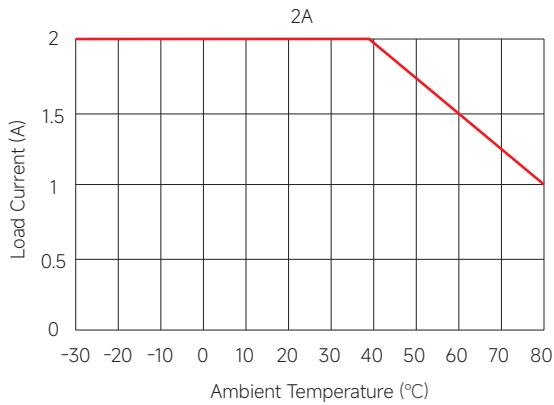

General Notes

1. Soldering must be finished within 10 seconds at 260°C, or finished within 5 seconds at 350°C. Otherwise it may cause damage to the relay.
2. Terminal polarity must be observed. Otherwise it may cause damage to the relay.
3. When ambient temperature is above 25°C, the maximum load current decreases. See thermal derating curve.
4. Capacitive load will produce very high surge current at the moment of conduction, which may lead to the damage of solid state relay due to the excessive surge current. Therefore, if the actual load is capacitive, or the load has paralleled large capacitance, it is strongly recommended that NTC should be connected in series in the load loop to suppress surge current in order to avoid damage to the product.
5. For products with a socket, the recommended installation torque for wiring is (0.8-1.2)N · m.

! Warnings

1. The product's side panels may be hot, allow the product to cool before touching.
2. Disconnect all power before installing or working with this equipment.
3. Verify all connections and replace all covers before turning on power.